




| Component Recommendations for Top Performance at Prime Focus | | | | | | | | |
|--|---------------------------------------|-------|--------------|---------------|---|---|-----------------------------------|--------------------------------------|
| | Recommended Maximum CCD/film diagonal | Speed | Focal Length | Field of View | Camera Connector | Additional Spacer to match 55mm reference | Accessory Lens | Spacer length from focuser drawtube |
| 1 | Up to 10mm | f/8.6 | 880mm | 0.65° | T-ring (TRG-1072) or Wide T-Ring (CWT-2070) | X | X | 6.8" (3) TLD-1000 (1) TLE-1076 |
| 2 | 40mm (SBIG STL series cameras) | f/6.9 | 704mm | 3.3° | SBIG STL Series (STL-1071) | 0.75" (1) TLA-0250 (1) TLC-0500 | 0.8X Reducer/Flattener (RFL-4087) | 4.8" (1) TLD-1000 (1) TLE-1076 |
| 3 | 40mm (SLR Cameras up to 35mm format) | f/6.9 | 704mm | 3.3° | T-ring (TRG-1072) or Wide T-Ring (CWT-2070) | X | 0.8X Reducer/Flattener (RFL-4087) | 4.8" (1) TLD-1000 (1) TLE-1076 |

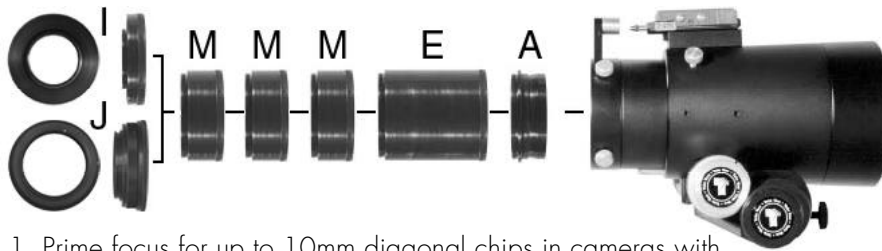

1. Prime focus for up to 10mm diagonal chips in cameras with 55mm chip to T-Ring distance.

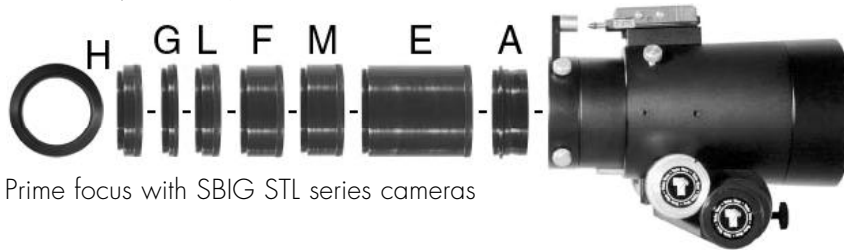

2. Prime focus with SBIG STL series cameras

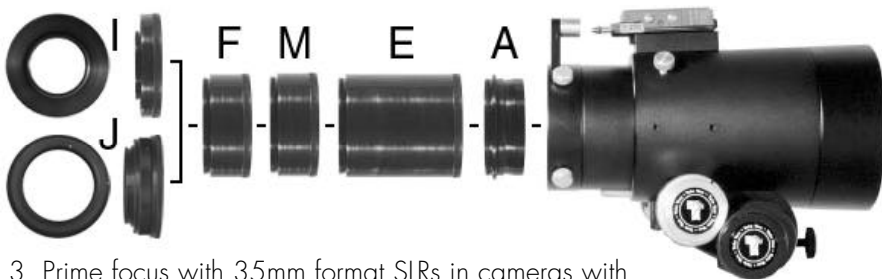

3. Prime focus with 35mm format SLRs in cameras with 55mm chip to T-Ring distance.



Accessories Key

- A. Imaging System Adapter (Supplied Standard)
- E. TLE-1076 - 3.8" long threaded extension for photography
- F. RFL-4087 - 0.8x Reducer/Flattener
- G. TLA-0250 0.25" long threaded extension
- H. STL-1071 SBIG STL series adapter
- I. TRG-1072 Standard T-Ring adapter
- J. CWT-2070 Canon Wide T Adapter
- K. TLB-0375 0.375" long threaded extension
- L. TLC-0500 0.500" long threaded extension
- M. TLD-1000 1.000" long threaded extension